


Stainless Steel Communal Door Specification

Door / Panel Size

Doors and panels are available up to 1200mm wide and 2200mm high. Glazed and solid top and side panels are available.

Configuration

Please note that these are shown with glazing panels, but any of these can be replaced with solid infill.

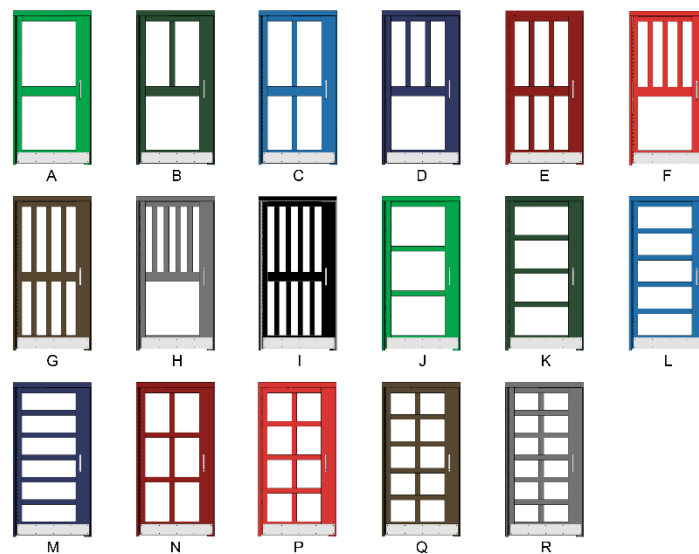

Glazing / Solid Infill

Polycarbonate - 6mm or 10mm

Laminate - 6mm or 10mm

Double glazed unit - 24mm

Solid infill - 10mm or 24mm

Hinge

Pivot or continuous hinge - Dorma RTS87, LCN 4011 (inward) or LCN 4111 (outward)

Locking

2no. NSD5000 maglocks quality stainless steel magnetic locks (1650lbs holding force per magnet and MOV surge protections)

2no. Securitron M62 series maglocks (not Secured by Design approved)

1no. Fulex 'Crime-Beater' multipoint lock, SbD handle set, Euro profile double cylinder

1no. Sashlock, SbD handle set, Europrofile double cylinder

1no. Deadlock, security escutcheon, Europrofile double cylinder

Ancillary Items

Threshold - 12mm ramped aluminium

1no. stainless steel bolt through pull handle - straight, 1no. push plate
2no. stainless steel bolt back to back pull handle - straight
1no. stainless steel bolt through pull handle - cranked, 1no. push plate
2no. stainless steel bolt back to back pull handle - cranked

Painted trim - 6pcs 50mm or 25mm

Additional keys

Doorstops

Wall mounted rubber buffer

Floor mounted rubber buffer

Bolt-in rail

Concrete-in rail

Bollard

Finish

Newton communal doors are polyester powder coated in a choice of 9 colours with a textured finish, as standard. Other colours and finishes are available on request.



Bright Green
BS4800 14 E 51



Holly Green
BS4800 14 C 39



Tartan Blue
BS4800 18 E 53



Sapphire Blue
RAL 5003



Dark Cherry
BS4800 04 D 45



Poppy Red
BS4800 04 E 53



Bitter Chocolate
BS4800 08 B 29



Basalt Grey
RAL 7012



Jet Black
RAL 9005